



Feature

60-70 % energy saving compared to traditional light and save money.

Life span > 50,000.00 Hours, IP65 industrial standards.

Good color rendering RA> 80, multi- color choice :2700-7000K.

Easy installation & free Maintenance.

Environmentally friendly.


Application

Squares, Schools, Parks, Yards, Residential areas, Factories and Others.


Pole' s Height:6-8m

Road Width:8-12m

Polar Candela Distribution

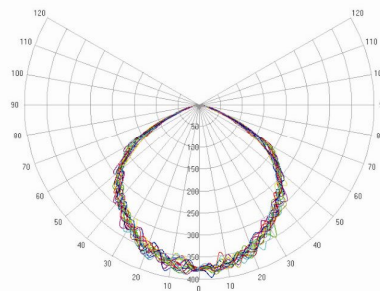

Dimensional

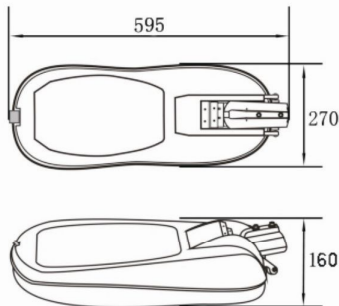

Technical Specification




Model No	LED Power	Voltage	PF	LED Lumen	Total Lumen
RT570SL40W	40W	AC (85V-265V) / (50-60Hz)	>0.9	120lm/watt	4800lm
RT570SL50W	50W	AC (85V-265V) / (50-60Hz)	>0.9	120lm/watt	6000lm
RT570SL60W	60W	AC (85V-265V) / (50-60Hz)	>0.9	120lm/watt	7200lm

Model No	Light Efficiency	Beam Angle	Ra	CCT	Life Time	Weight
RT570SL40W	85%	120°	Ra>80	2700K-7000K	>50000Hrs	6Kg
RT570SL50W	85%	120°	Ra>80	2700K-7000K	>50000Hrs	6Kg
RT570SL60W	85%	120°	Ra>80	2700K-7000K	>50000Hrs	6Kg

LED STREET LIGHT

RT570SL SERIES - - - - -

■ Illumination Data

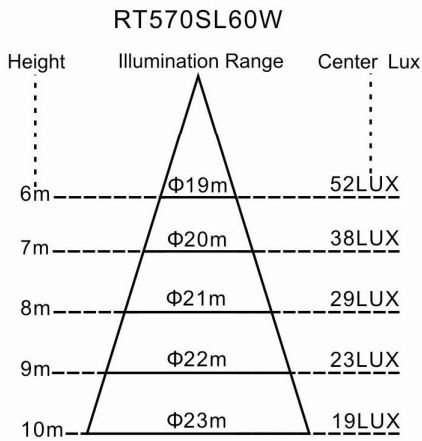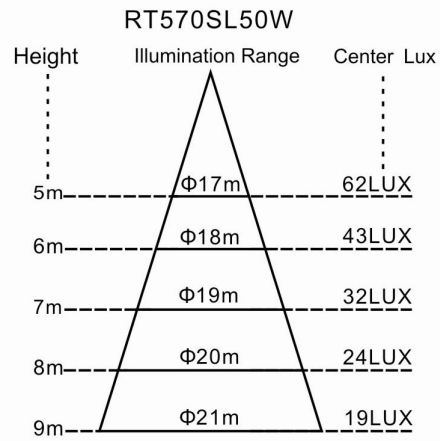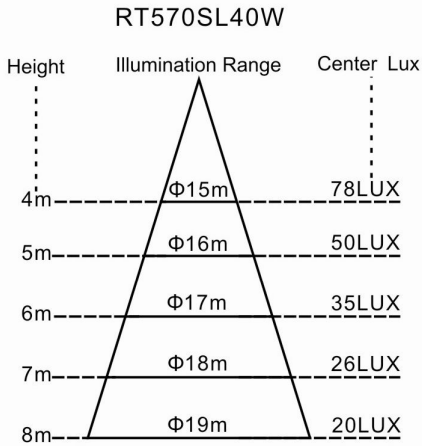

Note: The data is for reference only. Due to different testing equipments and environments, the data may vary in 5%.

■ Project Picture

